

8.

9.

24

12


10.

70% — 2 —40° +50°


— 2

: « »
: - , .6

!



2:

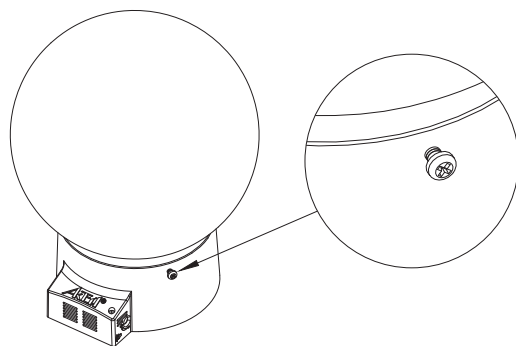

3:

.6




-

-26

« »

1.

- 1.1. (.1)
- 1.2. 85.
- 1.3. 220 50 .
- 1.4. (EAC),
- 1.5. II
- 1.6. 60598-1-2011.
- 15150-69, 3.1
- 2000 . I: -26.

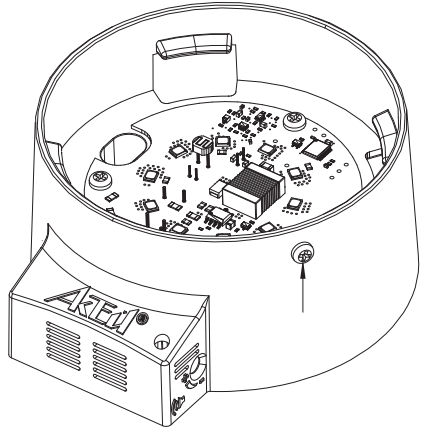

2.

- 170...255 , 50
- 6
- <0,4
- 550
- 5±2
- 52±5
- 60±10 ()
-) — IP20
- : -30° +40°
- UL94 — V2
- x x — 105,2x95x46,6
- 45 000

3.

- -1 .
- 1 .
- 1 .
- 1 .
- 1 .
- 26 — 1 .

4.

- 26

5.

- 5.1. 220 50 .
- 5.2.
- 5.3.
- 5.4.
- 5.5. -30° +40° .
- 5.6.

6.

- 6.1.
- 6.2.
- 6.3.

7.

- 7.1. 5 () .
- 7.2. () .
- 7.3.
- 7.4.
- 7.5. (.2).
- 7.6. 4 5 8 . ()
- 7.7.
- 7.8. (.3)
- 7.9. « »
- 7.10.